


APPLICATIONS: Provides guidance, support, or adjustment in a wide range of applications from manufacturing machinery to utility vehicles to diagnostic equipment.

Linear Motion Slide
 132 lbs. [60 kg.] Flat Mounted
 110 lbs. [50 kg.] Side Mounted
 May be vertically mounted (non-load bearing)



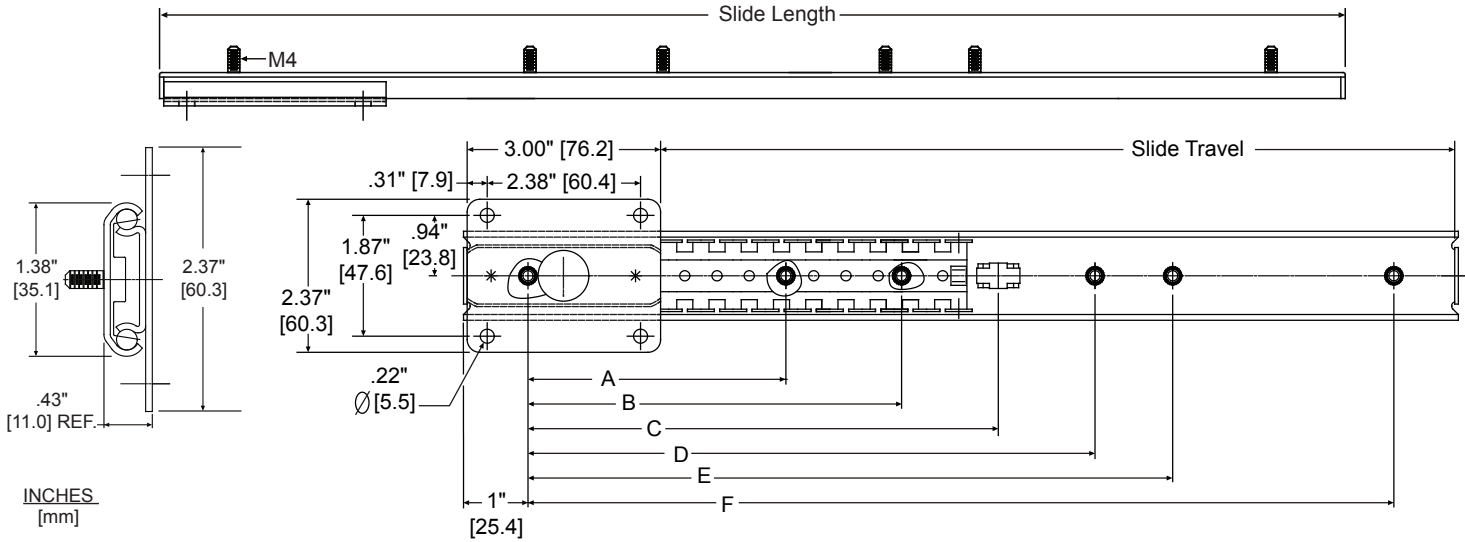


| | | | |
|-------------------|--|---------------------|--|
| Finish | Bright electro-zinc (C) • | Mounting | Side, Flat or Vertical |
| Length | 12"-28", 32", 36", and 40" [305 mm-711 mm, 813 mm, 914 mm, 1016 mm] | Hardware | #8 pan head screws (not included) |
| Height | Slide Height: 1.38" [35.1 mm] Slide Height Including Plate: 2.37" [60.3 mm] | Load Rating* | Flat mounted: 132 lbs. [60 kg.] per pair Side mounted: 110 lbs. [50 kg.] per pair |
| Travel | See chart | Movement | Steel ball bearings |
| Side Space | .43" [11.0 mm] | Disconnect | None |

| Part Number | Slide Length | Travel | A | B | C | D | E | F | Load Rating† | Load Rating†† |
|-------------|---------------|-----------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|---------------------|---------------------|
| C115-12 | 12" [305] | 8.90" [226] | 3.50" [88.9] | - | 5.00" [127.0] | 6.50" [165.1] | - | 10.00" [254.0] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-14 | 14" [356] | 10.87" [276] | 4.00" [101.6] | - | 6.00" [152.4] | 8.00" [203.2] | - | 12.00" [304.8] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-16 | 16" [406] | 12.87" [327] | 4.00" [101.6] | - | 7.00" [177.8] | 10.00" [254.0] | - | 14.00" [355.6] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-18 | 18" [457] | 14.88" [378] | 5.00" [127.0] | - | 8.00" [203.2] | 11.00" [279.4] | - | 16.00" [406.4] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-20 | 20" [508] | 16.89" [429] | 6.00" [152.4] | - | 9.00" [228.6] | 12.00" [304.8] | - | 18.00" [457.2] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-22 | 22" [559] | 18.90" [480] | 7.00" [177.8] | - | 10.00" [254.0] | 13.00" [330.2] | - | 20.00" [508.0] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-24 | 24" [607] | 20.87" [530] | 4.00" [101.6] | 8.00" [203.2] | 11.00" [279.4] | 14.00" [355.6] | 18.00" [457.2] | 22.00" [558.8] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-26 | 26" [660] | 22.87" [581] | 5.00" [127.0] | 10.00" [254.0] | 12.00" [304.8] | 14.00" [355.6] | 19.00" [482.6] | 24.00" [609.6] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-28 | 28" [711] | 24.88" [632] | 5.00" [127.0] | 10.00" [254.0] | 13.00" [330.2] | 16.00" [406.4] | 21.00" [533.4] | 26.00" [660.4] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-32 | 32" [813] | 28.90" [734] | 6.00" [152.4] | 12.00" [304.8] | 15.00" [381.0] | 18.00" [457.2] | 24.00" [609.6] | 30.00" [762.0] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-36 | 36" [914] | 32.87" [835] | 7.00" [177.8] | 14.00" [355.6] | 17.00" [431.8] | 20.00" [508.0] | 27.00" [685.8] | 34.00" [863.6] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |
| C115-40 | 40" [1016] | 36.79" [937] | 8.00" [203.2] | 16.00" [406.4] | 19.00" [482.6] | 22.00" [558.8] | 30.00" [762.0] | 38.00" [965.2] | 132 lbs [60 kg.] | 110 lbs [50 kg.] |

* Load rating based on 10,000 cycles per pair.
 • RoHS Compliant
 † Flat Mount
 †† Side Mount

Mounting Methods

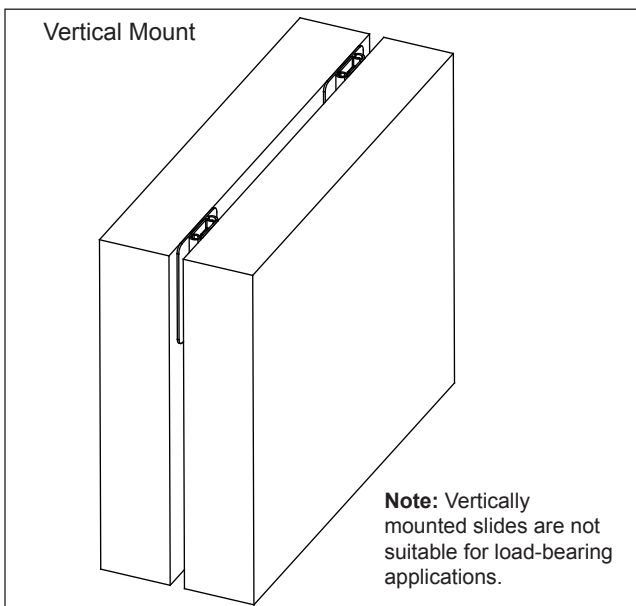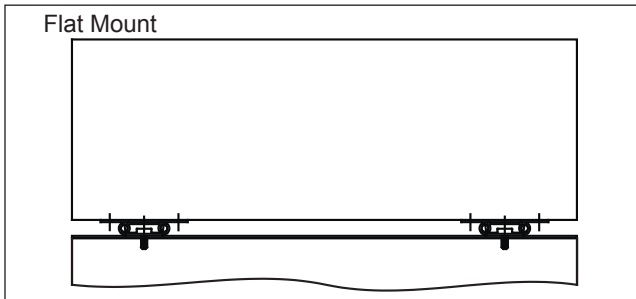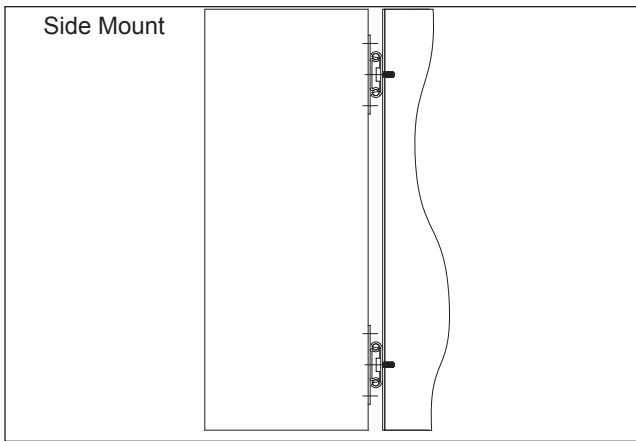

Installation Instructions

1. Install cabinet members into cabinet using pre-installed threaded studs (M4). Be sure slides are parallel.
Note: M4 nuts are not included.
2. Install moving component (drawer, tray, etc.) to the plate bracket that is pre-affixed to the inner member using #8 mounting hardware (not included).

Specifications

Slide members and ball retainers: cold rolled steel

Ball bearings: Carburized steel

RoHS Compliant

NOTE: Specifications, materials, prices, terms and delivery are subject to change without notice.

For the most current technical information visit www accuride.com

Packaging

Bulk Pack: Slides sold in box quantity, hardware is not included.

Slide lengths 12"–28" are packaged 20 each per box.

Slide lengths 32", 36" 40" are packaged 10 each per box.

Ordering instructions

Total Required Slides 20 Pair C 115 -12
Slide Finish _____
Slide Model _____
Slide Length _____

Accuride

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue
Santa Fe Springs, CA 90670

TEL (562) 903-0200

FAX (562) 903-0208

www accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China

Copyright © 2009 Accuride International Inc. 3700-9532(1221)-MK138-N-0909