



## 3600EC Easy-Close

Internal Easy-Close mechanism  
Up to 220 lbs. [100 kg.] load capacity\*\*

### Applications:

Heavy-duty/wide shelves, trays, or drawers in commercial, residential or industrial environments where a soft-close feature enhances operation.

<b>Finish</b>	Zinc (C)
<b>Lengths</b>	16" –32" [406 mm–813 mm]*
<b>Height</b>	2.09" [53.1 mm]
<b>Side Space</b>	.75" [19.1 mm] to .78" [20.0 mm]
<b>Travel</b>	Full extension
<b>Load Rating</b>	220 lbs. [100 kgs.]**
<b>Ball Bearings</b>	Carburized steel
<b>Mounting</b>	Side mount

\* Check for availability.

\*\* Load rating is based on 28" [700 mm] slides on an 18" [450 mm] wide drawer cycled 80,000 times. Load rating may vary based on application specifics.

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue  
Santa Fe Springs, CA 90670


TEL (562) 903-0200

FAX (562) 903-0208

www accuride com

Manufacturing, Engineering, and Sales  
United States • Japan • United Kingdom • Mexico • Germany • China

Copyright © 2015 Accuride International Inc. MK146-R1-0215

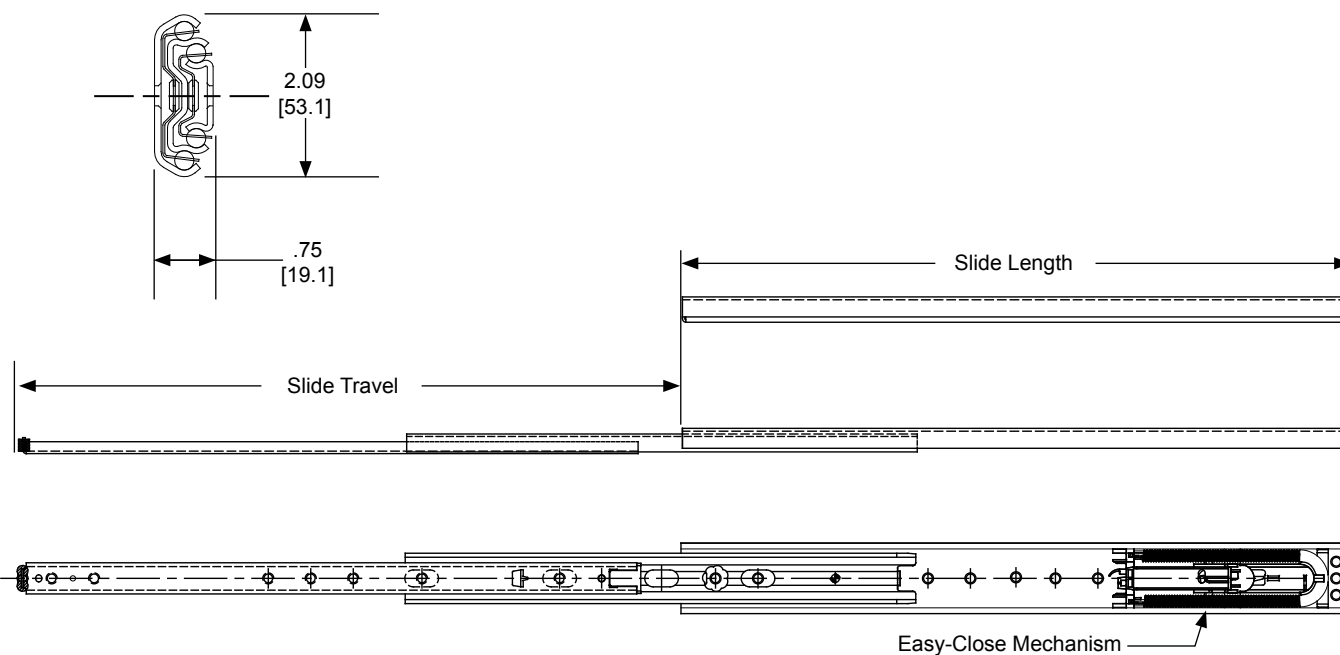

Inches  
mm

### Features

- High-end Easy-Close device dampens closure for smooth, quiet operation.
- Easy-close activates 1.77" [45 mm] from closed position.
- Mechanism is integrated into slide profile.
- Non disconnect.
- High-Low temperature grease used for lubrication.
- Silenced for quiet operation.
- RoHS compliant

### Options

- External Easy-Close mechanism: external construction provides increased slide strength.
- Hole pattern and mounting features may be customized to suit application.

**NOTE:** .77" [19.6 mm] to .78" [20.0 mm] side space required for optimum operation.

For more information contact us at [oemdirect@accuride.com](mailto:oemdirect@accuride.com) or call 1-800-938-0186